

SQ7131/SQ7133/SQ7135 **Brief Datasheet V1.7**

Page: 1/23
iMQ reserves the right to change the information in this document without prior notice. Please contact iMQ to obtain the latest version of product specification before placing your order. Use of iMQ devices in life support is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless iMQ from any and all damages, claims, suits or expenses resulting from such use.

No.: TDDS01-S7131-EN(B) | Name: SQ7131/SQ7133/SQ7135 Brief Datasheet | Version: V1.7

SQ7131/SQ7133/SQ7135

Low Power Secure ASIC, ECC-256/384, ECDSA, ECDH, AES-128/AES-256, SHA 256, TRNG

Basic Information

Operating Voltage : 2.0V ~ 5.5V

■ Operating Temperature : -40°C ~ 85°C

Security Features

- Asymmetric H/W Accelerator
 - NIST Standard P-256 /P-384 Elliptic
 Curve Support
 - ECDSA: FIPS186-4 Elliptic Curve Digital Signature
 - ECDH: FIPS SP800-56A Key Agreement
- Symmetric H/W Accelerator
 - FIPS 180-4 SHA-256 & FIPS 198-1
 HMAC Hash Algorithm
 - FIPS-197 AES-128/256:
 Encrypt/Decrypt, Galois Field
 Multiply for GCM
- Networking Key Management Support
 - KDF-PRF/AES/HKDF Calculation for TLS 1.2 & 1.3
 - ECDHE: Ephemeral key generation and key agreement
- True Random Number Generator(TRNG)
- Active Tamper Detection
- Simple/Differential Power Analysis Attack
 Countermeasure (SPA/DPA)
- Independent Internal Clock to PreventGlitch Attack
- 128-bit Unique UID

◆ Certification

- NIST CAVP: DRBG, AES, SHA2, ECDSA and HMAC
- NIST ESV Certified and CMVP FIPS 140-3
 Complied
- STQC Level 2 certified
- SESIP & PSA Level 3 certification ready

Package





SOP8

8-Lead DFN (3mm x 3mm)

♦ Secure Storage

- Chip-Dependent EncryptionTechnology
- Secure Storage for Key, X.509
 Compressed Certificate, Data
- Large User Data Storage : 5.6KB

♦ Communication Interface

- SQ7131 supports standard I2C (Max: 1MHz)
- SQ7133 supports standard SPI (Max: 10MHz@MODE3)
- SQ7135 supports SWI (Single Wire Interface) (230.4Kbps)

Applications

- Accessory Authentication
- System Anti-Cloning
- End-to-End Encryption
- Secure TLS 1.2 and 1.3 Communication
- AloT Device Security
- Secure Boot /Secure OTA

Page: 2/23

iMO reserves the right to change the information in this document without prior notice. Please contact iMO to obtain the latest version of product specification before placing your order. Use of iMO devices in life support is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless iMO from any and all damages, claims, suits or expenses resulting from such use.

No.: TDDS01-S7131-EN(B) Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7

Content

1.	PK	EFACE	4
2.	PIN	ASSIGNMENT/DESCRIPTION	5
2	. 1	SQ7131 PIN ASSIGNMENT/ DESCRIPTION	5
2		SQ7133 PIN ASSIGNMENT/DESCRIPTION	
2	.3	SQ7135 PIN ASSIGNMENT/DESCRIPTION	7
3.		ECTRICAL CHARACTERISTICS	
3	. 1	ABSOLUTE MAXIMUM RATING	8
3	.2	OPERATION CONDITIONS	9
	3.2	2.1 Operation Conditions	9
	3.2	2.2 I/O Characteristics	9
3	.3	DC CHARACTERISTICS	
3	.4	Power-on Reset Characteristics	
3	.5	BROR CHARACTERISTICS	
3		AC CHARACTERISTICS	
	3.6	o.1 AC Parameters	13
	3.6	o.2 I2C Characteristics	14
		3.3 SPI Characteristics	
		.4 SWI Characteristics	
3	.7 E	EPROM CHARACTERISTICSDIX A. PACKAGE INFORMATION	18
APF	PEN	DIX A. PACKAGE INFORMATION	19
		DIX B. ORDERING INFORMATION	
		DIX C. PRODUCT NUMBER INFORMATION	
RFV	ハコハ	YAOTZIH IAC	23

Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7 No.: TDDS01-S7131-EN(B)

1. Preface

SQ713x supports many hardware cryptographic accelerators: embedded high-quality TRNG (True Random Number Generator), SHA-256, asymmetric encryption ECC-384/ECC-256, and symmetric encryption AES-128/AES-256. It also has secure storage for ECC and AES keys storage.

The device is suitable for building high-security applications, such as IoT symmetric/asymmetric authentication, attestation, TLS1.2/1.3 secure connections, secure boot, secure OTA, and F/W protection, etc.

Secure storage for ECC and AES keys:

Key Type	SQ713x	Note
AES Key (AES-128/256)	12	Slot 8~19
ECC Private Key – 256	7	Slot 1~7
ECC Private Key – 384	2	Slot 20,21
ECC Public Key – 256	4	Slot 24,26~28
ECC Public Key – 384	4	Slot 30,32~34

Table 1-1 AES and ECC Key Slots

No.: TDDS01-S7131-EN(B) Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7

2. Pin Assignment/Description

2.1 SQ7131 Pin Assignment/ Description




Figure 2-1 Pin Assignment of SQ7131 SOP8




Figure 2-2 Pin Assignment of SQ7131 8-Lead DFN

Pin No.	Pin Name	I/O Type	Description
1	NC	- (No Connect
2	NC	/ - \	No Connect
3	NC	-	No Connect
4	VSS	GND	Ground
5	SDA	I/O	I2C Serial Data
6	SCL	I	I2C Serial Clock Input
7	NC	-	No Connect
8	VDD	Power	VDD power Supply

No.: TDDS01-S7131-EN(B) Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7

2.2 SQ7133 Pin Assignment/Description




Figure 2-3 Pin Assignment of SQ7133 SOP8




Figure 2-4 Pin Assignment of SQ7133 8-Lead DFN

Pin No.	Pin Name	I/O Type	Description
1	CS	1	SPI, Chip Select
2	MISO	0	SPI, Master In Slave Out
3	NC	-	No Connect
4	VSS	GND	Ground
5	MOSI	I	SPI, Master Out, Slave In
6	SCLK	I	SPI, Clock Input
7	NC	-	No Connect
8	VDD	Power	VDD power Supply

Name: SQ7131/SQ7133/SQ7135 Brief Datasheet No.: TDDS01-S7131-EN(B) Version: V1.7

2.3 SQ7135 Pin Assignment/Description




Figure 2-5 Pin Assignment of SQ7135 SOP8




Figure 2-6 Pin Assignment of SQ7135 8-Lead DFN

Pin No.	Pin Name	I/O Type	Function Description
1	NC	-	No Connect
2	NC	<i>/</i> - (No Connect
3	NC		No Connect
4	VSS	GND	Ground
5	SDA	I/O	SWI, single wire input/output pin
6	GPIO	I/O	General purpose input/output
7	NC	-	No Connect
8	VDD	Power	Positive Power Supply

No.: TDDS01-S7131-EN(B) Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7

3. Electrical Characteristics

3.1 Absolute Maximum Rating

The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

(Vss=0V)

Parameter	Symbol	Pins	Ratings	Unit
Supply Voltage	V_{DD}	-	-0.3 to 6.0	V
Input Voltage	V _{IN}	All I/O pins	-0.3 to VDD+0.3	V
Output Current(Total)	I _{OL}	All I/O pins	100	mA
Storage Temperature	T _{STG}	-	-50 to 125	°C

Name: SQ7131/SQ7133/SQ7135 Brief Datasheet No.: TDDS01-S7131-EN(B) Version: V1.7

3.2 Operation Conditions

The following defines the electrical characteristics of the device when it is operated at voltage and temperature maximum/minimum values. Unless otherwise stated, the standard conditions were determined at "operating temperature 25°C and operating voltage VDD = 3.3 V."

3.2.1 Operation Conditions

Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
Supply Voltage	V_{DD}		2.0	3.3	5.5	V
Operating Temperature	Та		-40	25	85	°C

3.2.2 I/O Characteristics

Parameter Symbol		Condition	Min.	Тур.	Max.	Unit
Input Low Voltage	V_{IL}	VDD=5V, temperature=25 °C	0		0.3 VDD	V
Input High Voltage	V _{IH}	VDD=5V, temperature=25 °C	0.7 VDD		VDD	V
Output Low Voltage	V _{OL}	VDD=5V, temperature=25 °C IOL= 3 mA	0		0.1 VDD	V
Output High Voltage	V_{OH}	VDD=5V, temperature=25 °C IOH= -3 mA	0.9VDD		VDD	V

No.: TDDS01-S7131-EN(B) Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7

3.3 DC Characteristics

Parameter	Symbol	Min.	Тур.	Max.	Unit
Supply Current in Operation Mode (Note)	IDD_N1	-	3.7	-	mA
Supply Current in Deep Sleep Mode	IDD_DS	-	0.3	-	uA
Supply Current in Operation MODE	IDD N2		4.3		mA
(During non-ECC Command Execution)	IDD_IV2		د.٦		1177
Supply Current in Operation MODE	IDD N3		7		mA
(During ECC Command Execution)	כוון_טטו		,		111/1

Note: The condition is waiting for Commands.



Name: SQ7131/SQ7133/SQ7135 Brief Datasheet No.: TDDS01-S7131-EN(B) Version: V1.7

3.4 Power-on Reset Characteristics

	Ta=-40~85°C								
Symbol	Description	Min.	Тур.	Max.	Unit				
tPPW	Power-on reset minimum pulse width	1	-	-	ms				
tPWUP	Warming-up time after a reset is clear and device ready	-	4	-	ms				
tVDD	Power supply rise time	0.5	-	5	ms				

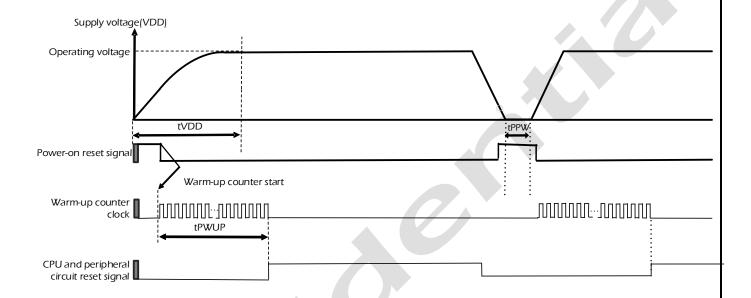


Figure 3- 1 Operation Timing of Power-on Reset

Note: In power-down process, the VDD must be 0V, then re-power-on to ensure the IC operating normal.

Name: SQ7131/SQ7133/SQ7135 Brief Datasheet No.: TDDS01-S7131-EN(B) Version: V1.7

3.5 BROR Characteristics

Ta=-40~85°C

Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
BROR detected voltage	VBROR_Falling	VDD fall time > tVDD (for tVDD please refer to <u>CH3.4</u> <u>Power-on Reset Characteristics</u>)	1.85	1.90	1.95	V

Name: SQ7131/SQ7133/SQ7135 Brief Datasheet No.: TDDS01-S7131-EN(B) Version: V1.7

3.6 AC Characteristics

3.6.1 AC Parameters

Parameter	Symbol	Min.	Тур.	Max.	Unit
Power-Up HW Ready Time	$T_{PU_{RDY}}$	-	9.5	-	ms
Power-Up Ready Time –	T		10.5		
Ready for Command	$T_{CMD_{RDY}}$	-	18.5	-	ms
Standby Time, Entering the	т		20		115
deep sleep mode	T_{STB}	-	20	-	us
Wake-Up Ready Time, deep	Trac		2.4		ms
sleep mode	Tw_{DS_RDY}	-	2.4		ms

Note: The "Typ." value is based on 25°C room temperature, and the Sleep command will change this value.

No.: TDDS01-S7131-EN(B) Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7

3.6.2 I2C Characteristics

Parameter	Symbol	Min.	Max.	Unit
Clock Frequency	f _{SCL}	-	1	MHz
Hold Time Repeated START Condition	t _{HD;STA}	0.45	-	us
Low Period of SCL Clock	t _{LOW}	0.65	-	us
High Period of SCL Clock	t _{HIGH}	0.35	-	us
Setup Time for a Repeated START Condition	t _{su;sta}	0.35	-	us
Data Hold Time	t _{HD;DAT}	-	0.5	us
Data Setup Time	t _{su;dat}	0.1		us
Rise Time of Both SDA and SCL	t _r	20	300	ns
Fall Time of both SDA and SCL	t _f	20	300	ns
Setup Time of STOP Condition	t _{su;sto}	0.6	-	us
Bus Free Time Between a STOP and START Condition	t _{BUF}	1.3	-	us
Capacitive Load for Each Bus Line	Сь	-	400	pF

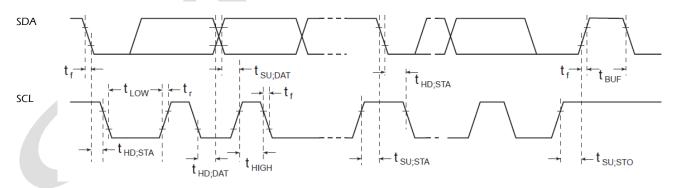


Figure 3-2 I2C Timing Sequence

Page: 14/23 iMQ reserves the right to change the information in this document without prior notice. Please contact iMQ to obtain the latest version of product specification before placing your order. Use of iMQ devices in life support is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless iMQ from any and all damages, claims, suits or expenses resulting from such use.

Name: SQ7131/SQ7133/SQ7135 Brief Datasheet No.: TDDS01-S7131-EN(B) Version: V1.7

3.6.3 SPI Characteristics

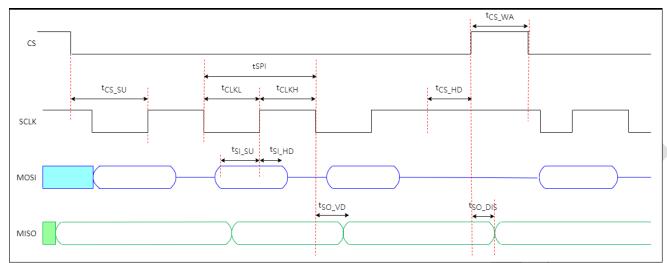


Figure 3-3 SPI Timing Sequence

Parameter	Symbol	Min.	Max.	Unit
SPI Frequency	fSPI	-		
(VDD=2.7V~5.5V, <=55°C)			10	MHz
(VDD=2.7V~5.5V, >55°C)			8	MHz
(VDD=2.0V~2.7V)			5	MHz
SPI Period	tSPI	1/fSPI	-	ns
High period of the SCLK pin	tCLKH	0.4 tSPI	-	ns
Low period of the SCLK pin	tCLKL	0.4 tSPI	-	ns
From SPICS active to first sample edge	tCS_SU	2.0 tSPI	-	ns
From last SCLK shift edge to SPICS inactive	tCS_HD	2.0 tSPI	-	ns
Time between SPI transaction	tCS_WA	3.0 tSPI	-	ns
Data Input Setup Time ¹	tSI_SU	25	-	ns
Data Input Hold time ¹	tSI_HD	10	-	ns
Data Output Valid Time ¹	tSO_VD	-	40	ns
Data Output Disable Time ¹	tSO_DIS	-	25	ns

Note 1: These parameters are characterized but not tested in production.

Page: 15/23
iMQ reserves the right to change the information in this document without prior notice. Please contact iMQ to obtain the latest version of product specification before placing your order. Use of iMQ devices in life support is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless iMQ from any and all damages, claims, suits or expenses resulting from such use.

No.: TDDS01-S7131-EN(B) Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7

3.6.4 SWI Characteristics

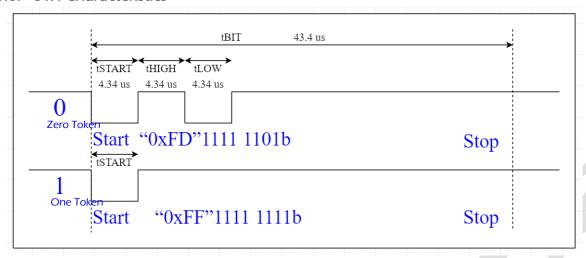


Figure 3-4 SWI Timing Sequence@230.4K (Typ.)




Figure 3-5 SWI Wake Token Timing Diagram




Figure 3-6 SWI Turn Around Timing Diagram

No.: TDDS01-S7131-EN(B) Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7

Parameter	Symbol	Direction ¹	Min.	Тур.	Max.	Unit
Start Token	tSTART	Input	4.10	4.34	4.56	μs
		Output	3.91	4.34	4.77	μς
Data Token High	tHIGH	Input	4.10	4.34	4.56	μς
		Output	3.91	4.34	4.77	μs
Data Token Low	tLOW	Input	4.10	4.34	4.56	μς
		Output	3.91	4.34	4.77	μς
Bit Time ²	tBIT	Input	41	43.4	46	μs
		Output	39	43.4	48	μς
Turn Around ³	tTURNAROUND	Input	10	-	-	μς
		Output	86	96	106	μs
Bus Timeout ⁴	tTIMEOUT	Input	65	-		ms

Note 1: Direction is with respect to SQ713x device. Input is from Master to SQ713x, Output is from SQ713x to Master.

- Note 2: Bit Timing: tSTART, tLOW, tHIGH, and tBIT are designed to be compatible with a standard UART baud rate at 230.4 kbps. The UART is set to one start bit, eight data bits, no parity and one Stop bit.
- Note 3: Turnaround time: SQ713x will initiate the first output low going transition after this time interval following the initial falling edge of the start pulse of the last bit of the transmit flag. After SQ713x transmits the last bit of a group, system must wait this interval before sending the first bit of a flag. It is measured from the falling edge of the start pulse of the last bit transmitted by SQ713x.

Note 4: Bus Timeout: SQ713x devices will wait for a Wake Token if the bus is inactive longer than this duration.



Name: SQ7131/SQ7133/SQ7135 Brief Datasheet No.: TDDS01-S7131-EN(B) Version: V1.7


3.7 EEPROM Characteristics


Parameter	Min.	Тур.	Max.	Unit
Write Endurance (Sector Endurance)	100,000	-	-	Cycles
Data Retention(at 25°C)	100	-	-	Years
Data Retention(at 85°C)	20	-	-	Years


Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7 No.: TDDS01-S7131-EN(B)


Appendix A. Package Information

SOP8





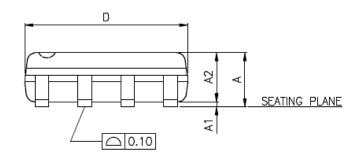





Symbol	mm					
Symbol	Min. Typ.		Max.			
Α	_	-	1.75			
A1	0.10	-	0.25			
A2	1.25	1				
р	0.31	0.51				
С	0.10 –		0.25			
D	4.90 BSC					
Е	6.00 BSC					
E1	3.90 BSC					
e	1.27 BSC					
L	0.40 –		1.27			
h	0.25 – 0.50		0.50			
θ	0° – 8°					


Page: 19/23
iMQ reserves the right to change the information in this document without prior notice. Please contact iMQ to obtain the latest version of product specification before placing your order. Use of iMQ devices in life support is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless iMQ from any and all damages, claims, suits or expenses resulting from such use.

Name: SQ7131/SQ7133/SQ7135 Brief Datasheet No.: TDDS01-S7131-EN(B) Version: V1.7

8-Lead DFN (3mm x 3mm)







	mm					
Symbol	Min.		Max			
Α	0.70	0.75	0.80			
A1	0.00	0.02	0.05			
А3	0.203 REF.					
b	0.20	0.30				
D	2.90	3.00	3.10			
Е	2.90	3.00	3.10			
e	0.50 BSC					
L	0.35	0.40	0.45			
D2	2.35	2.40	2.45			
E2	1.65	1.7	1.75			
К	0.20	_	_			

Page: 20/23 iMQ reserves the right to change the information in this document without prior notice. Please contact iMQ to obtain the latest version of product specification before placing your order. Use of iMQ devices in life support is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless iMQ from any and all damages, claims, suits or expenses resulting from such use.

No.: TDDS01-S7131-EN(B) Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7

Appendix B. Ordering Information

When ordering products, please provide the following details:

Ordering Information	Product Packing		Provisioning Service	Description
	SQ7131SP008C00R	Т	Y	I2C, SOP8, Tape & Reel, 85°C, provisioning service
Example	SQ7131N3008C00R	В	N	I2C, DFN 3x3, Tray, 85°C, no provisioning service
	SQ7133SP008S00R	В	Y	SPI, SOP8, Tube, 85°C, provisioning service
	SQ7133N3008S00R	Т	N	SPI, DFN 3x3, Tape & Reel, 85°C, no provisioning service
	SQ7135SP008W00R	В	Y	SWI, SOP8, Tube, 85°C, provisioning service
	SQ7135N3008W00R	Т	N	SWI, DFN 3x3, Tape & Reel, 85°C, no provisioning service

Note 1: "Packing"- T: Tape & Reel; B: Tube/Tray

Note 2: "Provisioning service for Customers"- Y: Need provisioning service for customers; N: No need for provisioning service from customers

Note 3: For Packing T, SOP: 4K/Reel, DFN: 5K/Reel



o. : TDDS01-S7131-EN(B	Name	: SQ7131/:	SQ713.	3/SQ7	135 Br	ief Data	asheet		Versi	on : V1.
Appendix C. Prod	uct Nu	mber Ir	nform	natio	n					
xample: MQ SQ product		<u>SO</u>	<u>71</u>	<u>31</u>	SP	800	<u>C</u>	<u>00</u>	R	Ţ Y
roduct Series										
ub Seriesackage Type										
Code Package Type SP SOP										
N3 DFN 3x3 in Count ————————————————————————————————————										
Code Pin 008 8										
ommunication Interface —— Code Type.										
C I2C S SPI										
W SWI										
Designator ————————————————————————————————————					<u> </u>					
perating Temp										
Code Operating Temp. R -40~85°C										
Packing]
Code Packing T T&R										
B Tube										
Provisioning Service —										
Code Provisioning Y Yes										
N No										

Page: 22/23
iMO reserves the right to change the information in this document without prior notice. Please contact iMO to obtain the latest version of product specification before placing your order. Use of iMO devices in life support is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless iMO from any and all damages, claims, suits or expenses resulting from such use.

No.: TDDS01-S7131-EN(B) Name: SQ7131/SQ7133/SQ7135 Brief Datasheet Version: V1.7

Revision History

Version	Approved	Description
V C131011	Date	Description
		1. In Appendix B. Ordering Information, add Note 3
V1.7	V/1.7	2. In Appendix B. Ordering Information, modify Packing "T" to "B" and
V 1.7	2025/8/5	the related descriptions in SQ7131N3008C00R, SQ7133SP008S00R,
		and SQ7135SP008W00R
V1.6	2025/4/23	1. Sync with full datasheet V1.6
V1.5	2024/4/18	1. Add SQ7135 SWI (Single Wire Interface) info
\/1.4	2024/2/5	1. Add 3.6.3 SPI Characteristics SPITiming Sequence"tSPI"
V1.4	2024/3/5	2. Add Appendix B. Product Number Information
		1. Sync with datasheet V1.3 full version
		2. Add PRODUCT number : SQ7131SP008C00R, SQ7131N3008C00R,
V1.3	2023/12/14	SQ7133SP008S00R, SQ7133N3008S00R
		3. Modify Supply Current in Operation MODE(During ECC Command
		Execution) in Appendix B to 7mA
V1.0	2023/1/18	1.1st version issue.